



All the patents are held accountable counterfeiting.

Features



Green Power

- UL508, EN 62368 approved
- Output Voltage/Current/Temperature Digital Display.
- Intelligent Detection of Output Error: Relay and LCD Alarm Flickering
- Standard/Din Rail Mounting Dual Purpose
- Easy mounting (one-step installation)
- Full Range Input with PFC
- Comply with High Efficiency Power 80Plus Criterion
- 94% High Efficiency
- Models with output voltage lower than 130VDC are build-in output stability monitor
- Split rail & Series connection possible
- Convection cooled high reliability
- 100% burn-in test
- 2 years warranty
- Output modify range: 5V-60VDC

DIMENSIONS:131(H)*119.2(D)*60.7(W)mm

WEIGHTS: 930g

General specifications

INPUT

Input range 90~264VAC
120~380VDC

Input frequency 47~63Hz

Inrush current (25°C) 20A/110VAC
40A/220VAC

Power factor 95% Min.

OUTPUT

Hold-up time 16ms

Short protection Re-power on to recover

Over load protection Short-circuit protection

1A power ready relay contacts are built in VAT module.

Detail specifications

480 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) 1			Ripple & Noise 4	Line REG. 2	Load REG. 3	Efficiency 5	O.V.P
		Min.	Rated	Max.					
RPH1480D-24CED	V : +24V ±10%	0A	20A	20A	240mV	±1%	±1%	94% Ref.	31.4 ~ 34.7V
RPH1480D-36CED	V : +36V ±10%	0A	13.3A	13.3A	360mV	±1%	±1%	94% Ref.	47.8 ~ 53.2V
RPH1480D-48CED	V : +48V ±10%	0A	10A	10A	480mV	±1%	±1%	94% Ref.	64.6 ~ 71.4V
RPH2480D1CED	V1 : +24V ±10%	0A	19.3A	19.3A	240mV	±1%	±1%	89% Ref.	31.4 ~ 34.7V 5.8 ~ 7.0V
	V2 : +5V	0A	3A	3A	50mV	±1%	±1%		

Intelligent Monitor Alarm Instructions:

- Voltage alarms when output voltage value is not in the range of -10% to +10%.
Voltage LCD flickering, open circuit for relay.
- Current alarms when output current value is over 100%.
Current LCD flickering, open circuit for relay.
- Temperature alarms when monitor panel temperature is lower than -20 or higher than 80 degrees Celsius.
Temperature LCD flickering, open circuit for relay.
- Relay alarm is normally closed contact. (For the two contacts, short circuit when power source is normal; open circuit when power source is abnormal.)

CE Standards

EN 55032, EN 55035,
EN 61000-3-2, EN 61000-3-3,
(EN 61000-4-2, EN 61000-4-3,
EN 61000-4-4, EN 61000-4-5,
EN 61000-4-6, EN 61000-4-8,
EN 61000-4-11)
Heavy Industry level, criteria A
LVD: EN 62368-1

Safety Standards

UL 508 APPROVAL

CE Marking

Environments

Operating Temperature -10 ~ 60°C, Ambient

Operating Humidity 20 ~ 90% RH, No Condensing

Storage Temperature -20 ~ 85°C, Ambient

Vibration 2G, 10~500Hz, 3 axes



All the patents are held accountable counterfeiting.


NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 220VAC input.
6. Hold-up time is measured at rated load and 220VAC input.
7. With ● are CE safety approval, but no UL safety approval, V2 output no Monitor Display, no relay alarm signal.
8. Output Voltage Adjustable is measured on 5% of rated load.
9. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
10. Reign Power reserve the right to change specifications at any time without notice.



All the patents are held accountable counterfeiting.

Mechanical Details

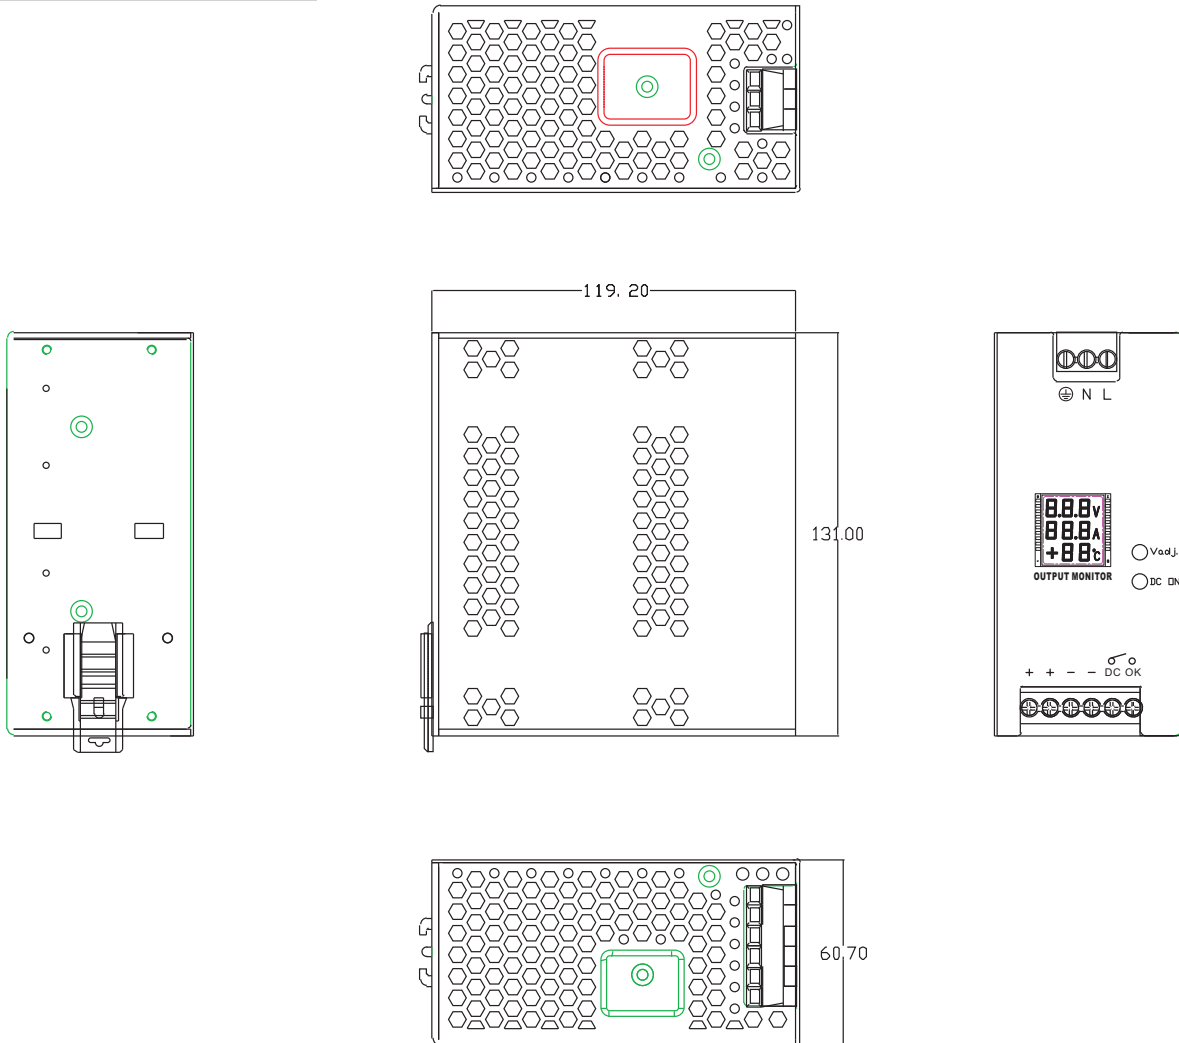

Panel Designation

CASE NO. : RPH1480DD
UNIT : mm
DIMENSION : 131(H)*119.2(D)*60.7(W)
MATERIAL : ALUMINUM
COLOR : ORIGINAL ALUMINUM

Symbol	Description
L	Line Terminal Of AC Input (No Polarity At DC Input)
N	Neutral Terminal Of AC Input (No Polarity At DC Input)
⊕	Grounding (Earth)
+	DC Positive Output Terminal
-	DC Negative Output Terminal
OUTPUT MONITOR	Voltage/Current/Temperature Display
V adj.	Potentiometer For Output Voltage
DC ON	Blue LED Indicator
DC OK	Contact of power functionality relay. Short-circuit is normal; Open circuit is abnormal.