



AC → DC SWITCHING POWER SUPPLY

LPF1960D SERIES

All the patents are held accountable counterfeiting.

Features



Green Power

- UL508, EN 62368 approved
- Output Voltage/Current/Temperature Digital Display.
- Intelligent Detection of Output Error: Relay and LCD Alarm Flickering
- Standard/Din Rail Mounting Dual Purpose
- Easy mounting (one-step installation)
- Full Range Input with PFC
- Comply with High Efficiency Power 80Plus Criterion
- 92% High Efficiency
- Models with output voltage lower than 130VDC are build-in output stability monitor
- Split rail & Series connection possible
- Fan cooling
- 100% burn-in test
- 2 years warranty
- Output modify range: 5V~60VDC

DIMENSIONS: 131(H)*119.2(D)*63.7(W)mm

WEIGHTS: 950g

General specifications

INPUT

| | |
|-----------------------|--------------------------|
| Input range | 90~264VAC 120~380VDC |
| Input frequency | 47~63Hz |
| Inrush current (25°C) | 20A/110VAC 40A/220VAC |
| Power factor | 95% Min. |

OUTPUT

| | |
|---|--------------------------|
| Hold-up time | 16ms |
| Short protection | Re-power on to recover |
| Over load protection | Short-circuit protection |
| 1A power ready relay contacts are built in VAT module. | |

Detail specifications

960 Watts (See note session for more details.)

| MODEL | O/P Volt Adj. ± % | Load(Current) ¹ | | | Ripple & Noise ⁴ | Line REG. ² | Load REG. ³ | Efficiency ⁵ | O.V.P |
|----------------|-------------------|----------------------------|-------|-------|-----------------------------|------------------------|------------------------|-------------------------|--------------|
| | | Min. | Rated | Max. | | | | | |
| LPF1960D-24CED | V : +24V ±10% | 0A | 40A | 40A | 240mV | ±1% | ±1% | 91% Ref. | 31.4 ~ 34.7V |
| LPF1960D-36CED | V : +36V ±10% | 0A | 26.6A | 26.6A | 360mV | ±1% | ±1% | 92% Ref. | 47.8 ~ 53.2V |
| LPF1960D-48CED | V : +48V ±10% | 0A | 20A | 20A | 480mV | ±1% | ±1% | 92% Ref. | 64.6 ~ 71.4V |

Intelligent Monitor Alarm Instructions:
 •Voltage alarms when output voltage value is not in the range of -10% to +10%.
 •Voltage LCD flickering, open circuit for relay.
 •Current alarms when output current value is over 100%.
 •Current LCD flickering, open circuit for relay.
 •Temperature alarms when monitor panel temperature is lower than -20 or higher than 65 degrees Celsius.
 •Temperature LCD flickering, open circuit for relay.
 •Relay alarm is normally closed contact. (For the two contacts, short circuit when power source is normal; open circuit when power source is abnormal.)

CE Standards

EN 55032, EN 55035,
 EN 61000-3-2, EN 61000-3-3,
 (EN 61000-4-2, EN 61000-4-3,
 EN 61000-4-4, EN 61000-4-5,
 EN 61000-4-6, EN 61000-4-8,
 EN 61000-4-11)
 Heavy Industry level, criteria A
 LVD: EN 62368-1

Safety Standards



UL 508 APPROVAL




CE Marking

Environments

| | |
|-----------------------|----------------------------|
| Operating Temperature | -10 ~ 60°C, Ambient |
| Operating Humidity | 20 ~ 90% RH, No Condensing |
| Storage Temperature | -20 ~ 85°C, Ambient |
| Vibration | 2G, 10~500Hz, 3 axes |

NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 220VAC input.
6. Hold-up time is measured at rated load and 220VAC input.
7. Output Voltage Adjustable is measured on 5% of rated load.
8. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
9. Reign Power reserve the right to change specifications at any time without notice.

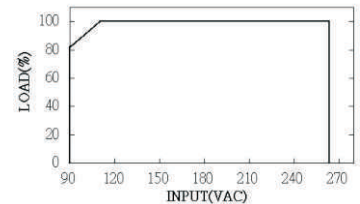

Derating curve

WEB : <http://www.switching-powers.com>
 E-mail : rp21003f@ms7.hinet.net


Tel : 886-2-22997550
 Fax : 886-2-22997596

REIGNPOWER
 S.M.P.S



All the patents are held accountable counterfeiting.

Mechanical Details

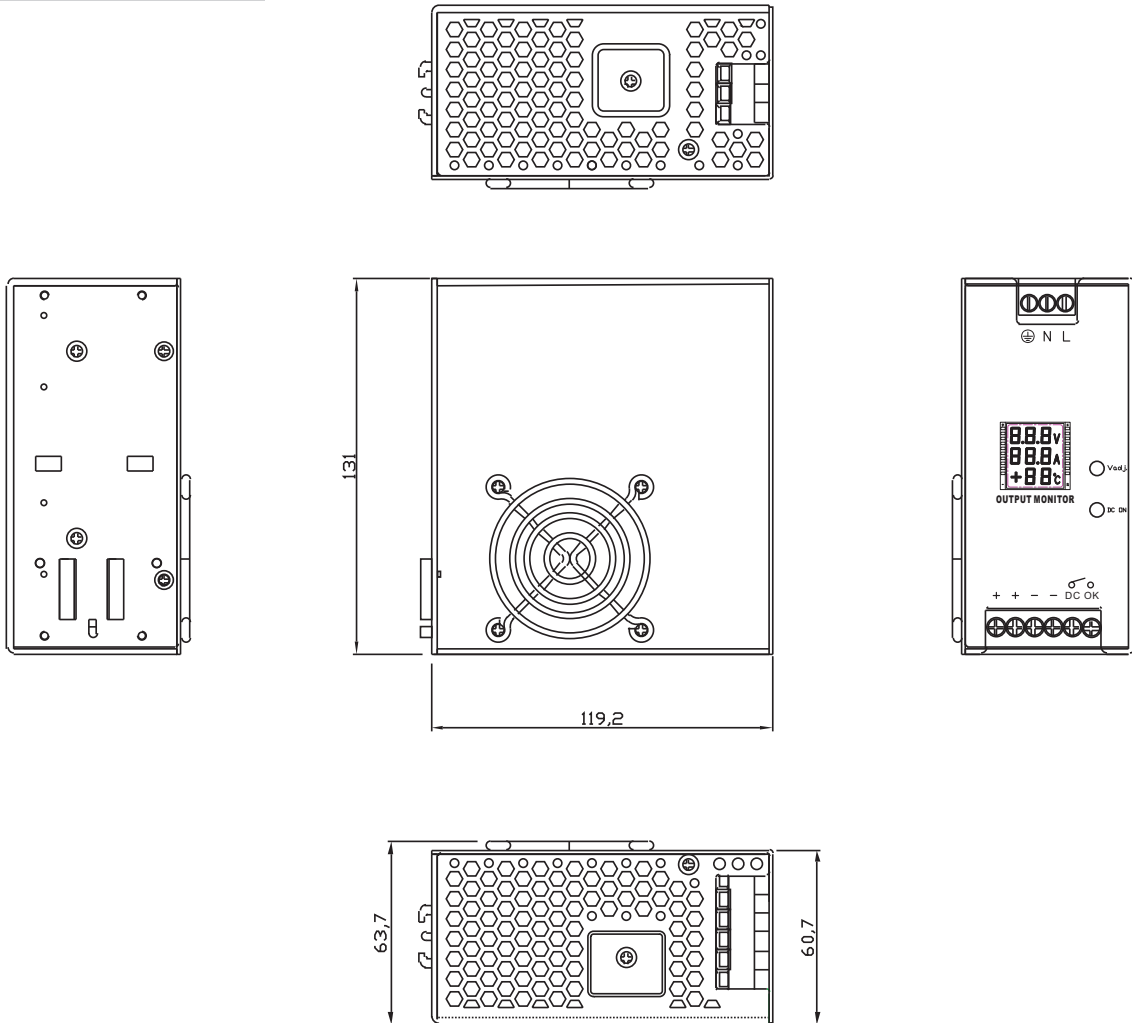

Panel Designation

CASE NO. : LPF1960DD
UNIT : mm
DIMENSION : 131(H)*119.2(D)*63.7(W)
MATERIAL : ALUMINUM
COLOR : ORIGINAL ALUMINUM

| Symbol | Description |
|----------------|---|
| L | Line Terminal Of AC Input (No Polarity At DC Input) |
| N | Neutral Terminal Of AC Input (No Polarity At DC Input) |
| ⊕ | Grounding (Earth) |
| + | DC Positive Output Terminal |
| - | DC Negative Output Terminal |
| OUTPUT MONITOR | Voltage/Current/Temperature Display |
| V adj. | Potentiometer For Output Voltage |
| DC ON | Blue LED Indicator |
| DC OK | Contact of power functionality relay. Short-circuit is normal; Open circuit is abnormal. |